


SBC Arm® Architecture

miriac® SBC-LS1046A-TSN

Single Board Computer based on NXP® QorIQ® LS1046A CPU

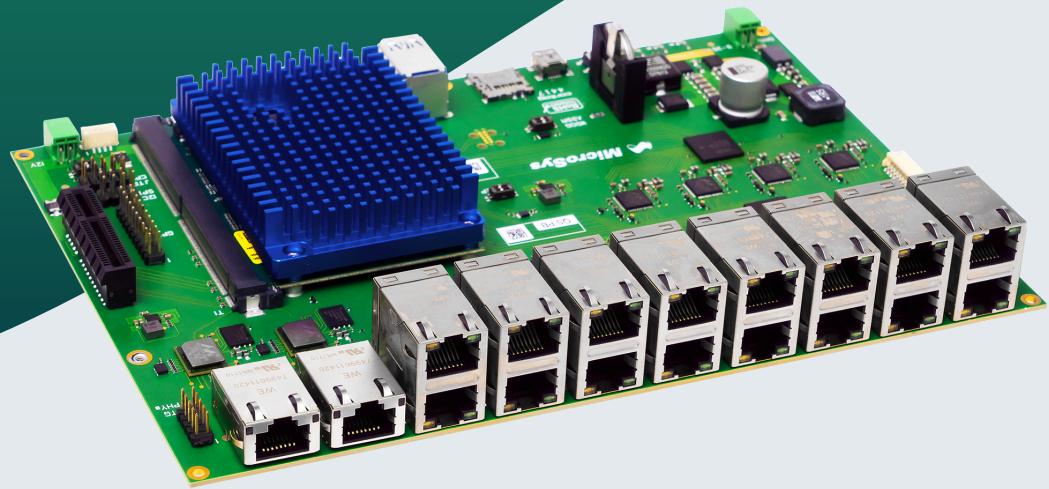

Highlights



- 2x 10 Gb Interfaces for High Speed Ethernet
- 8x 1 Gb TSN connectors (driven by 2 switches) for reliable real time communication over Ethernet
- NXP® QorIQ® LS1046A quad core Arm® Cortex®-A72 CPU
- All on board supply voltages are monitored by a separate μ -controller.
- ECC Memory, Encryption (optional)





Product Description

The miriac® SBC-LS1046A-TSN platform is part of a system family to address the increasing communication demand in industrial applications. For that the carrier offers the support of the Time Sensitive Net-working Standard (TSN) and holds a high-performance networking infrastructure. It integrates for example 2x 10 Gb and up to 6x 1 Gb Ethernet ports, 1x PCIe x4 port and 8x 1 Gb TSN connectors (driven by 2 switch-es) for reliable real time communication over Ethernet.



Features

| | |
|------------------------------|--|
| CPU | |
| Architecture: | Arm® Cortex®-A72 |
| Processor: | NXP® QorIQ® LS1046A CPU: 4 Arm® Cortex®-A72 64-bit cores at up to 1.6 GHz core frequency |
| DRAM: | Up to 8 GB 64-bit DDR4 ECC RAM at 2100 MT/s |
| Memory | |
| Flash: | Up to 2 GB SLC NAND Flash & up to 64 MB QuadSPI Flash |
| Flash Card: | Yes |
| Boot Flash: | QSPI, SD/MMC, NAND Flash |
| Ethernet | |
| 10GbE: | 2x |
| 1GbE: | 6x |
| TSN / IEEE 1588: | 8x 1 Gbit TSN |
| High Speed IO | |
| USB 3.0: | 2x |
| miniUSB: | 1x debug |
| PCIe: | 1x PCIe x4/x1 via edge card connector |
| Operating Condition | |
| Power Supply Voltage: | Single 9 to 36 V DC input supply voltage range |
| RTC: | Yes |
| RTC-Buffer: | CR2032 battery |
| Temperature: | 0 °C to 70 °C |
| Mechanical | |
| Dimensions: | 220 mm x 150 mm |
| Software / Additional | |
| Software Support: | - Linux - Microware OS-9 - Others on request |
| Additional: | - 4x RGB LED - Compatible variants available with QorIQ LS1023A, |


- LS1043A, LS1048A, LS1088A,
- Temperature sensor
- PCIe rootcomplex or endpoint switchable
- Overvoltage protection
- Dev Kit for immediate start up, e.g. power supply, cables (optional)

General Note:

Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to [contact us](#) directly to discuss your desired configuration.



Block Diagrams

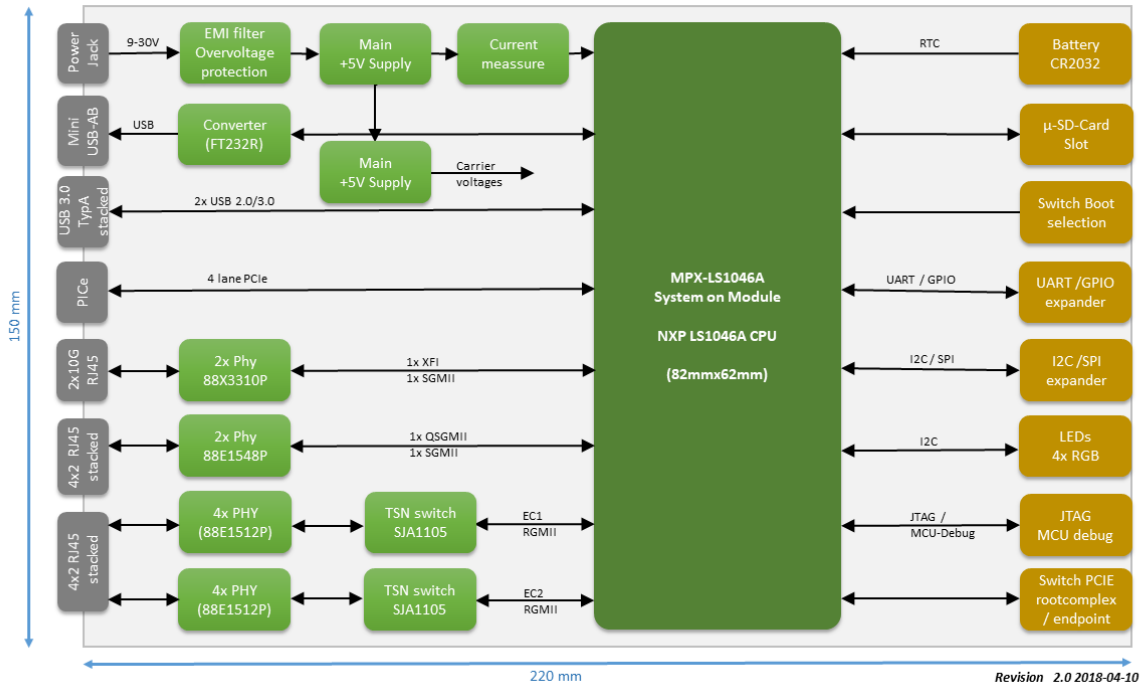

miriac® SBC-LS1046A-TSN






Order Info

| Name | Code | Description | Status |
|---|--------|---|--------|
| miriac® SBC-LS1046A-TSN | 856402 | includes MPX-LS1046A SoM (order# 855610) with 1.6 GH, 4 GB DDR4 RAM (64-bit), ECC, 512 MB Flash | active |
| miriac® SBC-LS1046A-TSN Development Kit | 856411 | for MPX-LS1046A SoM, includes order # 856402, Linux BSP, accessories | active |



Related Products

| Name | Description | Image |
|---------------------|--|---|
| miriac® MPX-LS1046A | Low energy class server module with quad Arm® Cortex®-A72 cores and up to two 10 GbE |  |
| miriac® SBC-LS1046A | |  |
| CRX06-TSN | Carrier Boards |  |

 **MicroSys**
Creating Embedded Systems

Mühlweg 1
82054 Sauerlach
Germany

Sales: +49 8104 801-130
E-Mail: info@microsys.de
www.microsys.de

