


Network Interface Cards

M2 Ethernet-Card

Network Interface Cards

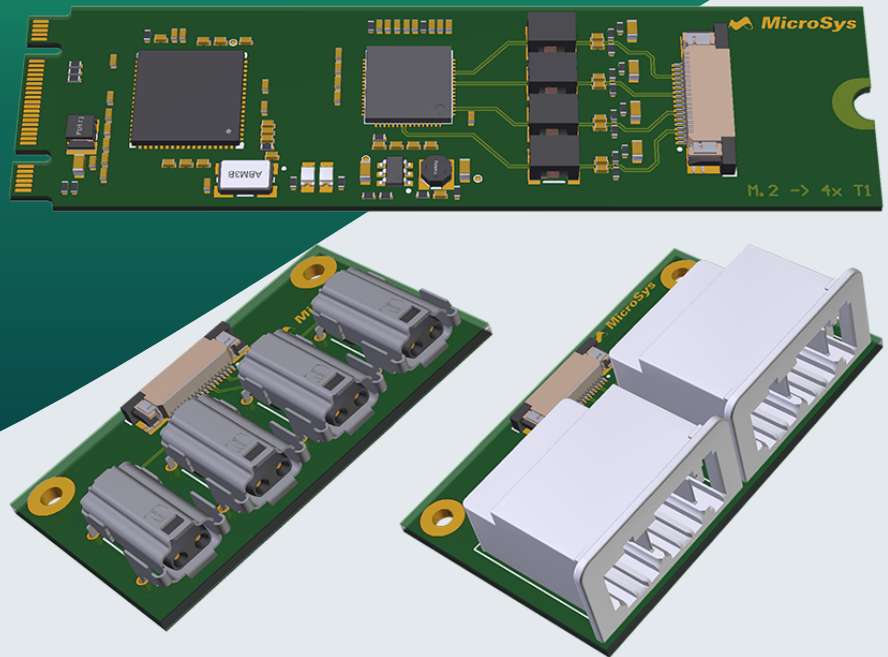

Highlights

- 4x 100BASE-T1 ports
- M.2 2280
- ca. 1W





Product Description

The MicroSys M.2 module expands a system by 4x 100BASE-T1 ports.

The M.2 module and the additionally offered T1-Connector boards are designed for operation in the extended temperature range from -40°C to 105°C.



Features

Ethernet	
Interfaces:	PCIe
Operating Condition	
Operating Temperature:	Commercial (0°C to +70°C)
	Industrial (-40°C to +85°C)
	Automotive (-40°C to +105°C)
Formfactor:	M.2 2280
Mechanical	
Power consumption:	ca. 1W
Connector Type:	1x M.2
	4x T1-Connector
Software / Additional	
Software Support:	- Windows
	- Linux
	- Android drivers available

General Note:

Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to [contact us](#) directly to discuss your desired configuration.



Mühlweg 1
82054 Sauerlach
Germany

Sales: +49 8104 801-130
E-Mail: info@microsys.de
www.microsys.de

