

## System Examples

# miriac® ACU-LX2160A

The miriac® ACU-LX2160A Automation Control Unit is based on the miriac® MPX-LX2160A System-on-Module (SoM).



## Highlights

- 16 Arm® Cortex®-A72 64-bit cores up to 2.2 GHz
- 10x 1GbE
- Up to 64 GB DDR4 RAM
- Temperature sensors, cooling controller, RTC, management engine





## Product Description

The miriac® ACU-LX2160A Automation Control Unit is a high-end platform that integrates a Micro-Sys-designed carrier board and the miriac® MPX-LX2160A System-on-Module (SoM). It features NXP's powerful multicore communication processor with 16 Arm® Cortex®-A72 cores, running at up to 2.2 GHz. This commercial off-the-shelf (COTS) solution is ideal for applications requiring multi-sensor systems, highly computational power, and numerous high-speed I/Os. It is perfect for demanding use cases such as Data loggers, GPS Positioning Systems, Test and Measurement Equipment or Advanced Driver Assistance Systems (ADAS), especially in harsh environments.

Key functions of the system include processing sensor data via Ethernet and outputting control data to downstream units, enabling capabilities like environment perception, mission logic, and obstacle avoidance.

- Data loggers
- Test and Measurement Equipment
- Advanced Driver Assistance Systems (ADAS)
- GPS Positioning Systems
- AI via Hailo-8™

Please note with regard to the features shown below: Technical changes reserved



## Features

| CPU                   |  |
|-----------------------|--|
| Architecture:         | Arm® Cortex®-A72   |
| Processor:            | NXP® Layerscape® LX2160A with 16 Arm® Cortex®-A72 64-bit cores up to 2.2 GHz   |
| DRAM:                 | - Up to 64 GB DDR4 RAM & optional ECC, up to 3200MT/sec,<br><br>- Up to 4 ranks using a combined design: discrete & SODIMM |
| Memory                |  |
| Flash:                | Up to 2 Gb Octal SPI Flash at up to 200 MHz, double operation / golden image   |
| Flash Card:           | Yes  |
| Boot Flash:           | Boot select: XSPI, eMMC or external SD card  |
| eMMC:                 | 8 GB   |
| Ethernet              |  |
| 1GbE:                 | 10x  |
| High Speed IO         |  |
| PCIe:                 | PCIe x8 & PCIe x4 (Gen3)   |
| Operating Condition   |  |
| Conformity:           | CE   |
| Power Supply Voltage: | Single 12 V / 24V DC power input   |
| RTC:                  | Yes  |


|                              |                       |
|------------------------------|-----------------------|
| RTC-Buffer:                  | Supercap              |
| Temperature:                 | -40 °C to 70 °C       |
| <b>Mechanical</b>            |                       |
| Dimensions:                  | 365 mm x 300 mm       |
| <b>Software / Additional</b> |                       |
| Software Support:            | - Linux               |
|                              | - Others (on request) |

**General Note:**


Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to [contact us](#) directly to discuss your desired configuration.



# Block Diagrams

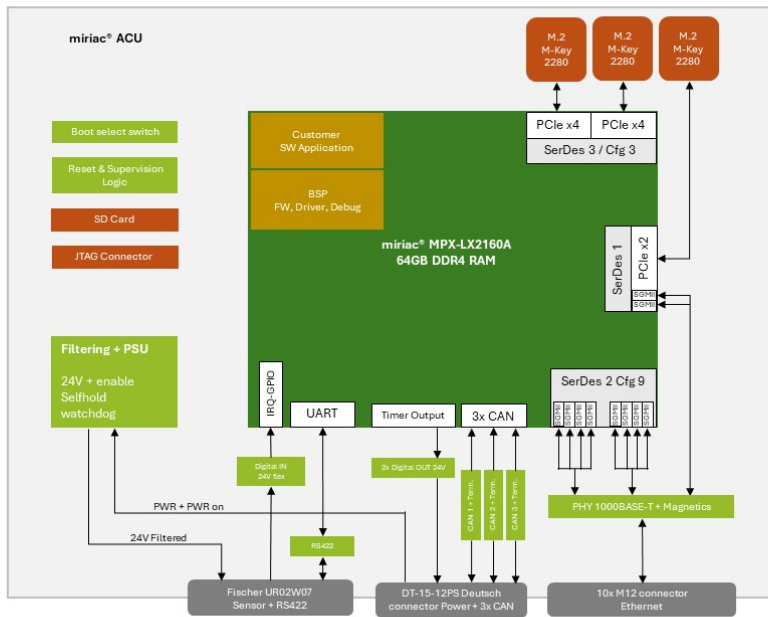

## miriac MPX-LX2160A

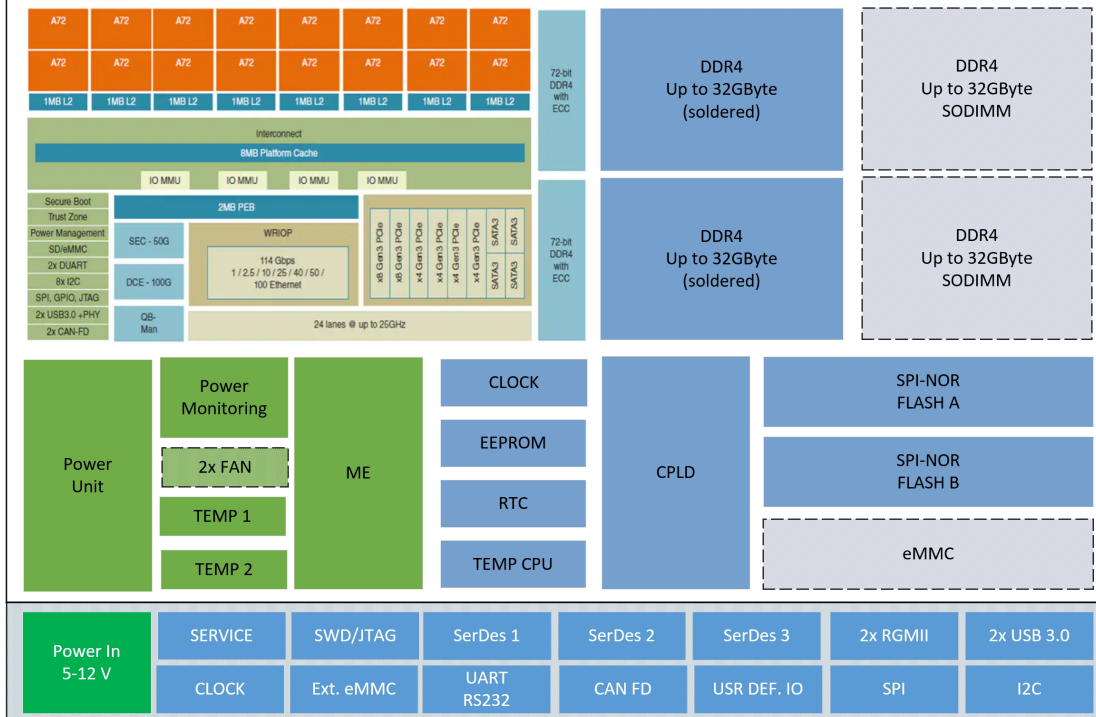




## Order Info

| Name                | Code | Description         | Status      |
|---------------------|------|---------------------|-------------|
| miriac® ACU-LX2160A | tbd  | miriac® ACU-LX2160A | coming soon |



## Related Products

| Name                | Description  | Image   |
|---------------------|--|---|
| miriac® MPX-LX2160A | Rugged edge server class SoM for high-end communication applications |  |

 **MicroSys**  
Creating Embedded Systems

Mühlweg 1  
82054 Sauerlach  
Germany

Sales: +49 8104 801-130  
E-Mail: [info@microsys.de](mailto:info@microsys.de)  
[www.microsys.de](http://www.microsys.de)

  
NXP  
Gold  
Partner