


CRX07-TSN

Fits our Layerscape® Family Member:
mirrac® MPX-LS1028A

- 1x Display Port
- 5x 1GbE TSN / IEEE 1588
- 2x USB 3.0

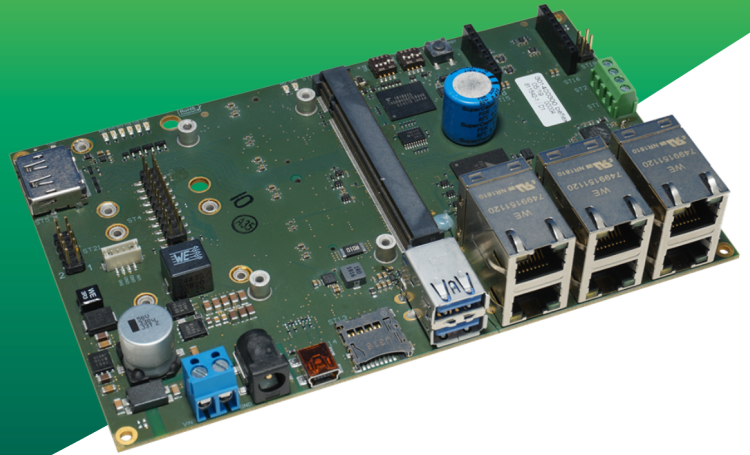

[Home](#) / [Products](#) / [CRX](#) / **CRX07-TSN**

Find out more about our CRX7-TSN below:



Features

Graphic

HDMI Interface	1x DisplayPort
----------------	----------------

Ethernet

TSN	Y
TSN / IEEE 1588	5x Gbit TSN

High Speed IO

USB 3.0	2x
miniUSB	1x debug
µUSB	1x debug

IO

CAN FD	2x
--------	----

GPIOs	Yes
-------	-----

JTAG Debug Interface	Yes
----------------------	-----

Additional

Reset Push Button	Yes
-------------------	-----

Operating Condition

Power Supply Voltage	Single 9 to 24 V DC input supply voltage range
----------------------	--

Mechanical

Dimensions	160 mm x 100 mm
------------	-----------------


Extension Card Modules

miniPCIe	2x
----------	----

mSATA	1x
-------	----

Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to contact us directly to discuss your desired configuration.

Take a look at related products



miriac® MPX-LS1028A